


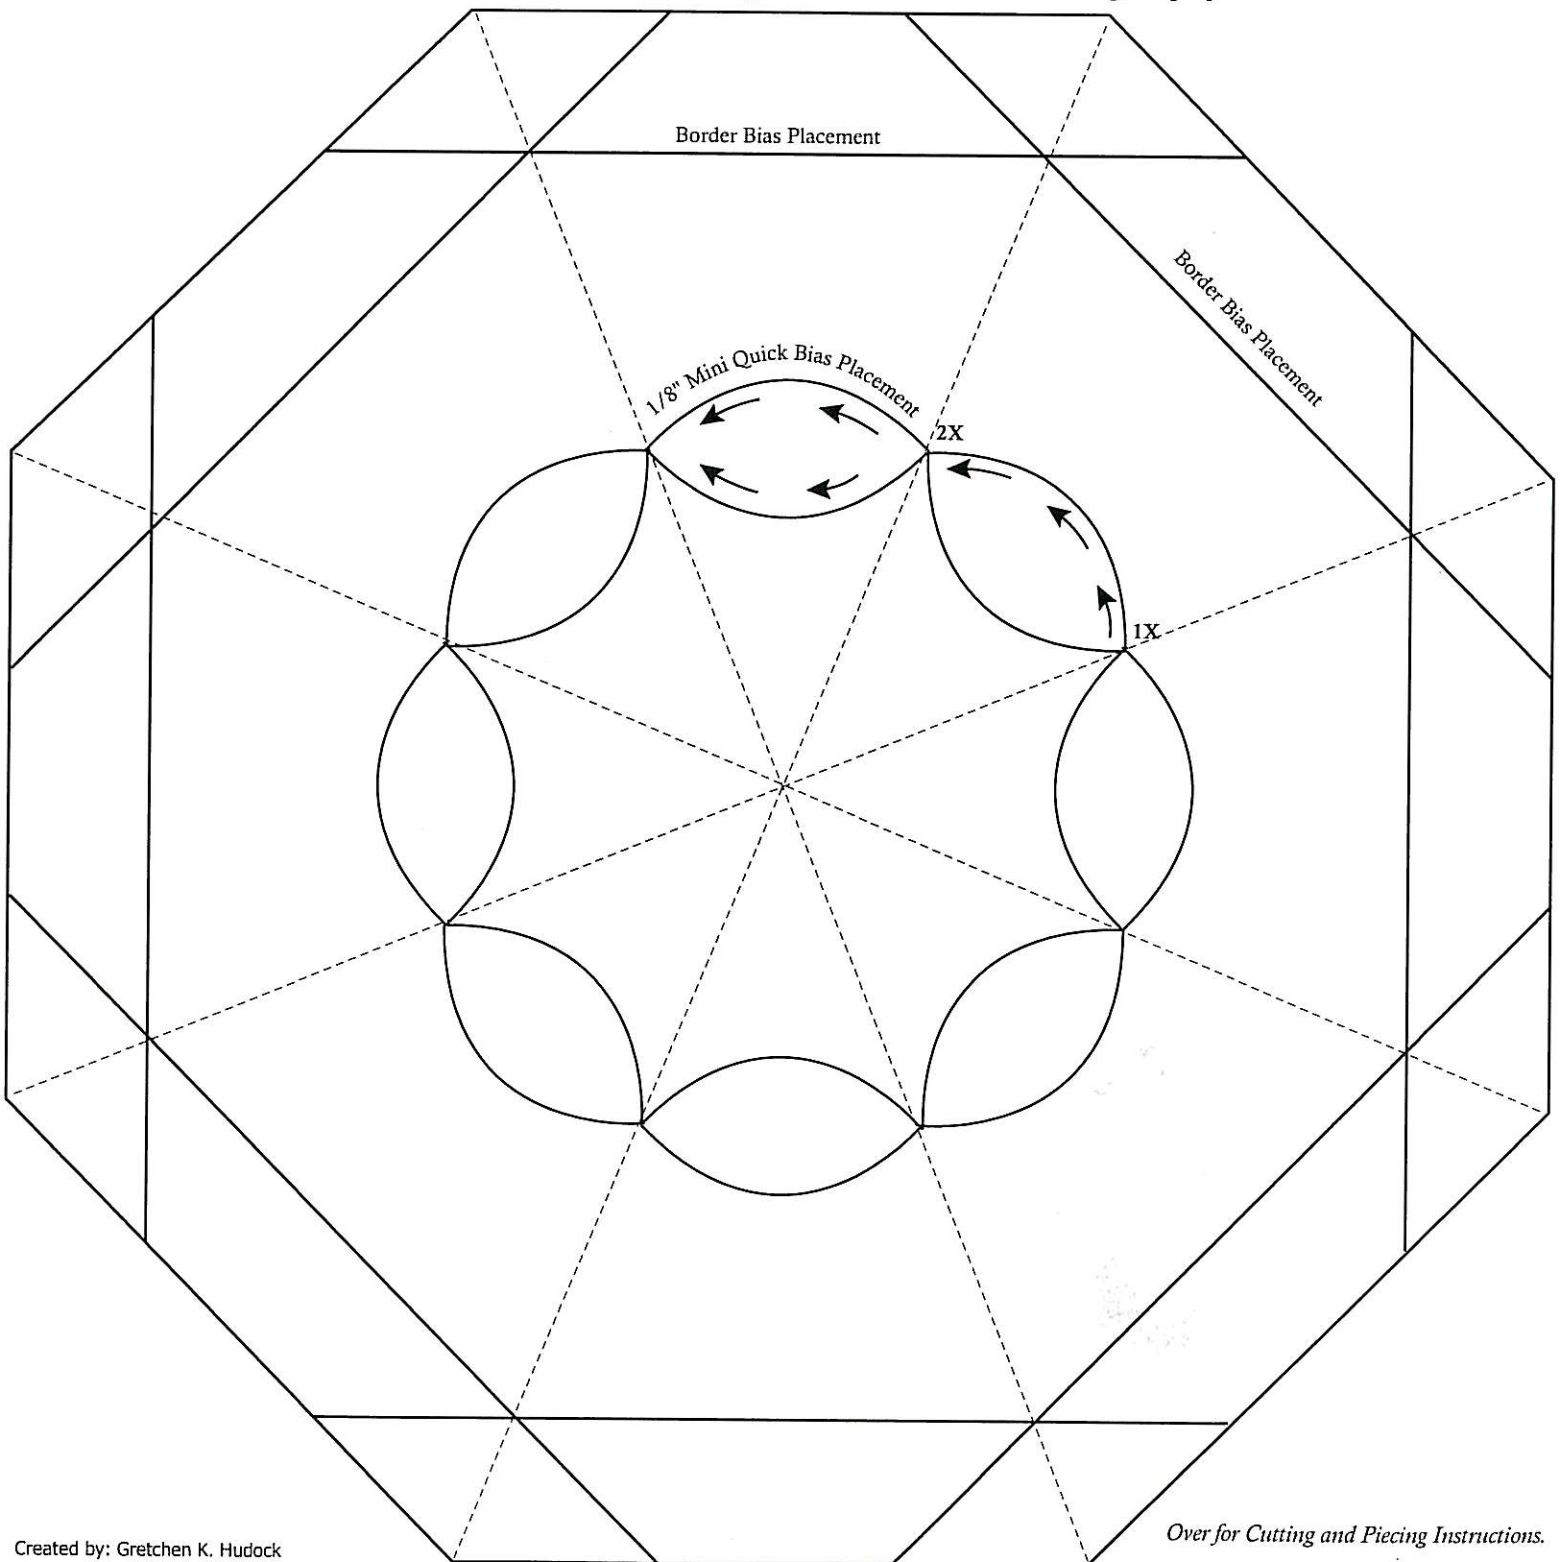


A Quick Bias Project Time Saver Table Topper

Combining the NEW 1/8" Mini Quick Bias
and
The Versatile Border Bias

 Dashline - positioning lines

This project sheet is 50% of actual size of
16" x 16" Table Topper . Please enlarge the size to 100% when making the project.



A Quick Bias Project Time Saver Table Topper

Combining the NEW 1/8" Mini Quick Bias and The Versatile Border Bias

Supplies needed:

- 5/8 yard fabric to coordinate with chosen bias (also used for backing)
- 20" square of lightweight batting
- 1/8" Mini Bias of your choice-1 2/3 yards approximately
- Border Bias of your choice-4 yards approximately (also used for binding)
- Thread to match 1/8" Mini Bias and Border Bias
- Mini Iron™(optional but very useful)

Construction:

- Cut a 20" square of fabric. (Remainder will be used for backing.) Fold in quarters. Lightly press folds. Transfer design onto fabric one section at a time using fold lines as guidelines for placement.
- Layer with batting and backing. Pin baste. Avoid placing pins in design area.
- Apply 1/8" Mini Bias in center design, following starting points and centering over pattern lines. There are two starting points as two separate rows of bias will be applied and stitched. Beginning at 1X, start applying Mini Bias. A Mini-iron simplifies this step because it's easier to get into smaller curved areas. (Hint: Adjust the temperature of the Mini-iron if necessary. Use high for cottons and medium for metallic.) Peel off the paper backing from 12"-15" of the Mini Bias. Peel off more paper as necessary during pressing. Press but do not stretch the Quick Bias. If a mistake is made, rewarm the area, lift the bias and reiron into position. Stitch in place using a small(2.0) stitch length.
- Apply Border Bias along marked line keeping top edge of border bias even with the marked line. There will be about ¼" of space between edge of border bias and outer drawn line of project. Stitch Border Bias in place along both edges and add decorative stitch if desired down center of Border Bias.
- Add any other desired quilting.
- Remove any remaining pins and press project.
- Trim ¼" from outer marked line along all sides.
- Add Border Bias for binding.

GRETCHEN K. HUDOCK is Author of *Quick Quilts Using Quick Bias*, published by Martingale and Company.

